




ENERG
енергия · ενεργεια




NIBE

NIBE F2040-12



55 °C

35 °C

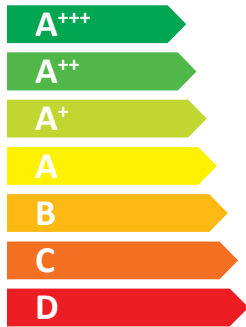

A++

A++



dB



57 dB

■ 13
■ **10**
■ 12
kW

■ 12
■ **12**
■ 12
kW



2019

811/2013




ENERG
енергия · ενεργεια


Y IJA
IE IA

NIBE



NIBE F2040-12 + VVM320

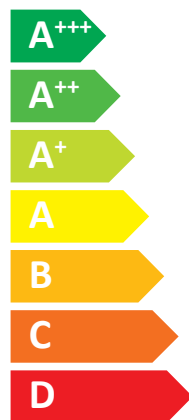

A++

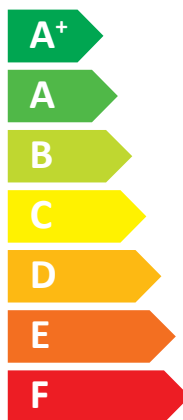

A

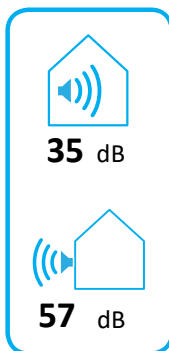


2019

811/2013








ENERG


енергия · ενέργεια





NIBE


NIBE F2040-12 + VVM320













+ 

+ 

+ 


+ 

Supplier's name:	NIBE		
Model:	NIBE F2040-12+ VVM 320		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	57		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):				NIBE F2040-12+ VVM 320											
Type of heat source/sink:				Air-to-water											
Low-temperature heat pump:				No											
Equipped with supplementary heater:				Yes											
Heat pump combination heater:				Yes											
Climate condition:				Average											
Temperature application:				Medium temperature (55 °C)											
Applied standards: EN14825 and EN16147															
Rated heat output				Prated	10,0	kW		Seasonal space heating energy efficiency							
								η_s	132	%					
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>							
Tj = -7 °C	Pdh	8,9	kW		Tj = -7 °C	COPd	1,99	-							
Tj = +2 °C	Pdh	5,5	kW		Tj = +2 °C	COPd	3,22	-							
Tj = +7 °C	Pdh	3,5	kW		Tj = +7 °C	COPd	4,61	-							
Tj = +12 °C	Pdh	5,0	kW		Tj = +12 °C	COPd	6,25	-							
Tj = biv	Pdh	9,2	kW		Tj = biv	COPd	1,90	-							
Tj = TOL	Pdh	8,1	kW		Tj = TOL	COPd	1,92	-							
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		-							
Bivalent temperature				T _{biv}	-7,9	°C		Operation limit temperature				TOL	-10	°C	
Cycling interval capacity for heating				P _{cyc}		kW		Cycling interval efficiency				COP _{cyc}		-	
Degradation co-efficient				C _{dh}	0,98	-		Heating water operating limit				WTOL	58	°C	
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>							
Off mode				P _{OFF}	0,002	kW		Rated heat output				P _{sup}	1,9	kW	
Thermostat-off mode				P _{TO}	0,014	kW									
Standby mode				P _{SB}	0,015	kW		Type of energy input				Electric			
Crankcase heater mode				P _{CK}	0,035	kW									
<i>Other items</i>															
Capacity control				variable				Rated air flow rate, outdoors					4380	m ³ /h	
Sound power level, indoors/outdoors				L _{WA}	35/57	dB		Rated water flow rate, indoor heat exchanger					0,86	m ³ /h	
Annual energy consumption				Q _{HE}	6136	kWh		Rated brine or water flow rate, outdoor heat exchanger						m ³ /h	
<i>For heat pump combination heater:</i>															
Declared load profile				XL				Water heating energy efficiency				η_{wh}	98	%	
Daily electricity consumption				Q _{elec}	7,75	kWh		Daily fuel consumption				Q _{fuel}		kWh	
Annual electricity consumption				AEC	1702	kWh		Annual fuel consumption				AFC		GJ	
Approved by:															
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden											